

DANNY GATTON TELE WIRING


Oct. 4th 2002

FROM NECK PU:
BLACK (HOT)
WIRE TO SWITCH,
BARE AND
GREEN WIRE
TO GROUND,
RED AND WHITE
WIRE SHRINK
TUBED TOGETHER

FROM BRIDGE PU:
BLACK (HOT)
WIRE TO SWITCH,
BARE AND
GREEN WIRE
TO GROUND,
RED AND WHITE
WIRE SHRINK
TUBED TOGETHER

GROUND WIRE
UNDERNEATH
BRIDGE PLATE

WHITE AND
BLACK WIRE TO
OUTPUT JACK

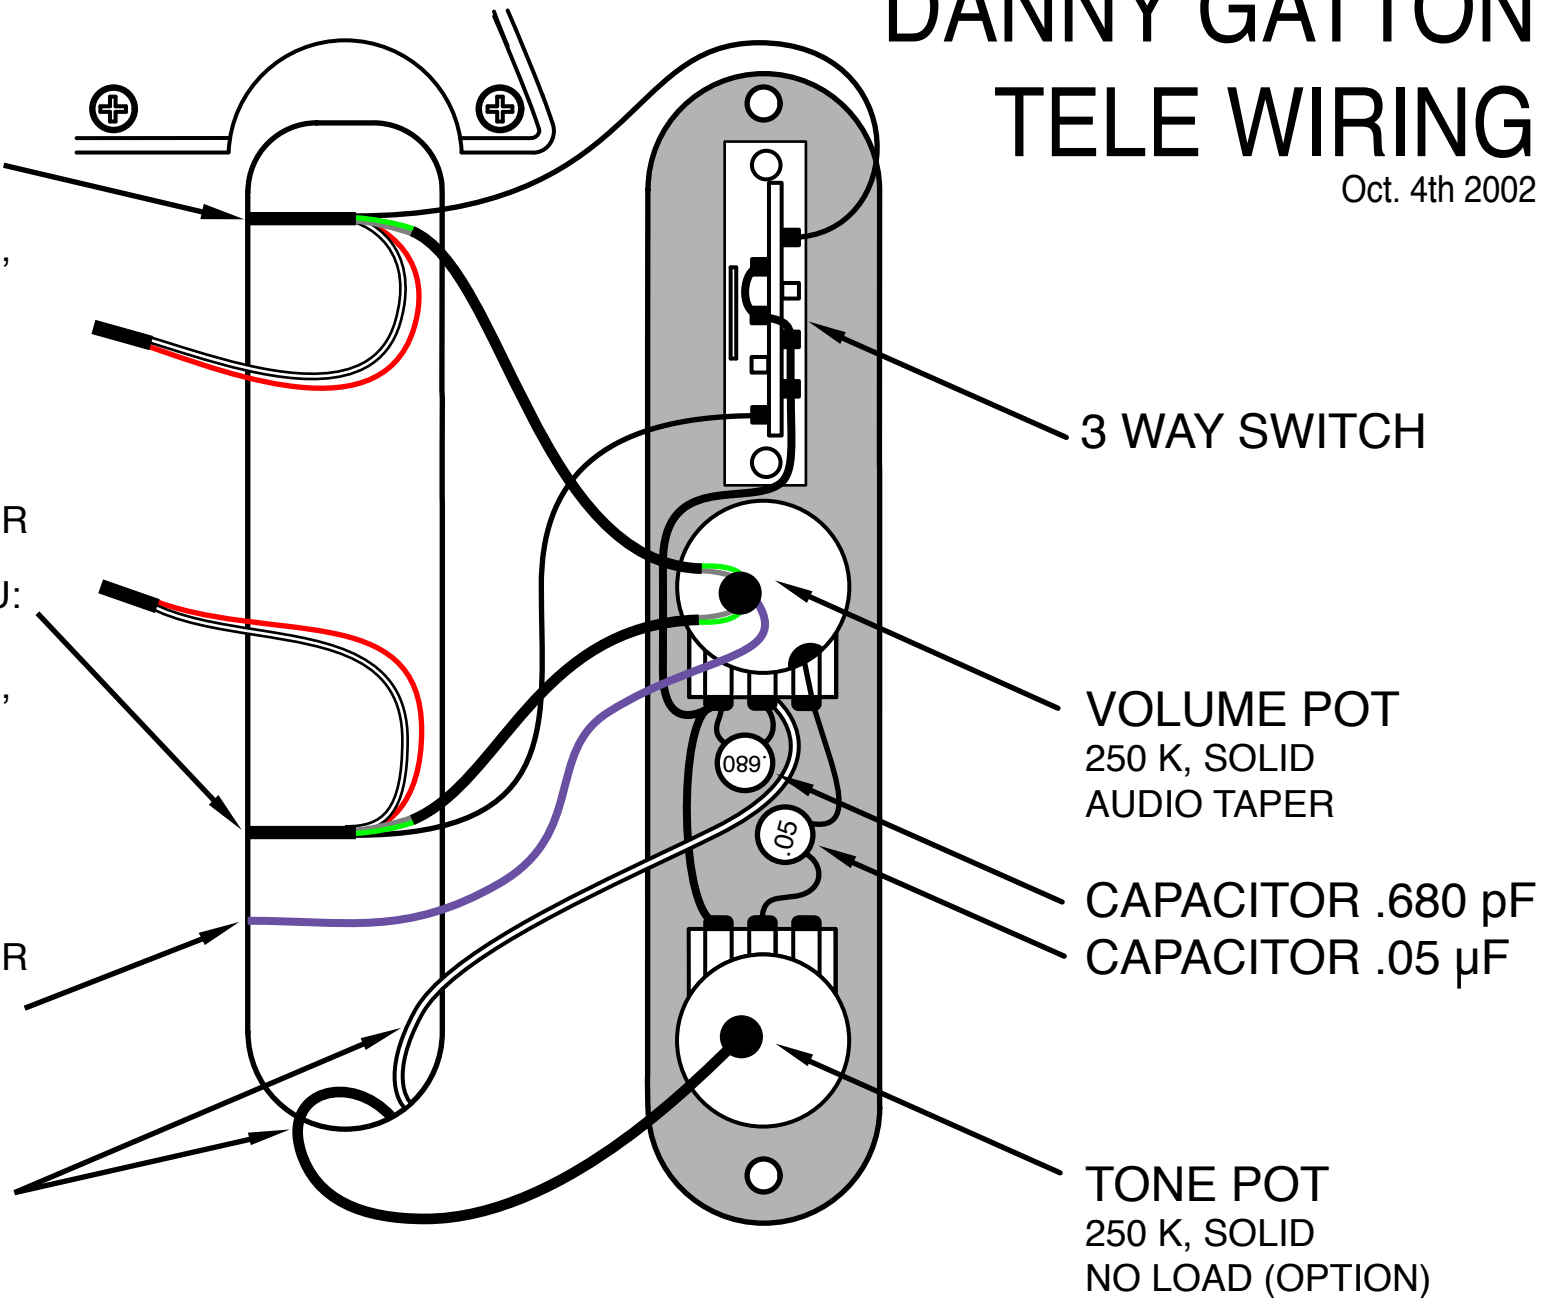

3 WAY SWITCH

VOLUME POT
250 K, SOLID
AUDIO TAPER

CAPACITOR .680 pF
CAPACITOR .05 μ F

TONE POT
250 K, SOLID
NO LOAD (OPTION)